

**TENDER REFERENCE NO.: KK/08/2026/SSBH**

**MINISTRY OF HEALTH  
NEGARA BRUNEI DARUSSALAM**

**KERJA-KERJA PENAMBAHAN LETAK KERETA KAWASAN  
BERDEKATAN BLOK L HOSPITAL SURI SERI BEGAWAN,  
KUALA BELAIT**

**TENDER FEES : \$30.00**

**RECEIPT NO. :**

**CLOSING DATE : ON TUESDAY, 03 MARCH 2026**

**TIME : 12.00 PM**

**FOA :**

**THE CHAIRMAN  
MINI TENDER BOARD, TENDER BOX  
GROUND FLOOR, MINISTRY OF HEALTH  
COMMONWEALTH DRIVE  
BANDAR SERI BEGAWAN BB3910  
NEGARA BRUNEI DARUSSALAM**

**(CLUSTERING)**

## TABLES OF CONTENTS

	DESCRIPTION	PAGES
A1	PARTICULAR SPECIFICATION	1 - 4
B1	SCOPE OF WORK	5 - 7

## SECTION 2

### SPECIFICATIONS AND PARTICULAR CONDITION

#### KERJA-KERJA PENAMBAHAN LETAK KERETA KAWASAN BERDEKATAN BLOK L HOSPITAL SURI SERI BEGAWAN, KUALA BELAIT

---

##### A1. PARTICULAR SPECIFICATIONS

###### GENERAL

- a. This particular specification incorporating the Summary of Tender is supplementary to the Public Works Department General Specification for Building and Construction Works (Revised 1988), General Conditions of Contract (with quantities) and Department of Electrical Services General Conditions of Contract. The Specification, the Tender and Letter of Acceptance together with the documents referred to herein, Drawings, Schedule of Quantities & Prices and other relevant forms shall be deemed to form one contract and shall be complimentary to one another.
- b. The scope of work is for the construction and expansion of parking lot near Block L of Suri Seri Begawan Hospital. If any item in the Summary of Tender is left unpriced, the cost of that item is deemed to have been included in the rest of the items and NO EXTRA COST will be paid in respect thereof.
- c. The quality workmanship and standard of works, materials and equipment execute under this contract must comply with the guidelines and regulations currently in force to compliance to other guidelines.
- d. The works shall include the supply of all materials and all necessary labour for the proper completion of the works in accordance to all requirements of all relevant authorities having jurisdiction over the works together with all incident work pertaining there to even though not specifically mentioned herein.
- e. The successful contractor shall work in such manner as to provide minimum disturbances and minimum inconvenience to the occupants / client. This means that the contractor may be required to stop working in a certain area time when instructed by S.O.
- f. All the works on site shall be carried out with the cooperation of the Superintending Officer / Client. The Registered workers on site must wear proper identification badges and uniform – overall showing clearly the name of their Company as well suitable U.S. or British Standard safety shoes and safety helmet as when required.
- g. Proper safety measures shall be taken by the contractor while dealing with switch board, welding / brazing equipments and pressure vessel on site, care also must be taken during commencing works against any type of damages such as fire or the likes. The Contractor shall be made fully responsible for completing “**KERJA-KERJA PENAMBAHAN LETAK KERETA KAWASAN BERDEKATAN BLOK L HOSPITAL SURI SERI BEGAWAN, KUALA BELAIT.**” and in case of negligence to safety or carelessness which causes any damage within the installation period.
- h. All the old equipments, parts and waste removed from the site shall be removed from site to an approved dumping area promptly without further reminder and any additional cost to the Government of Negara Brunei Darussalam.
- i. The Contractor shall not install any equipment / parts without prior approval from the Superintending Officer regarding quality / make / country of origin.
- j. Before tendering all Tenderers shall visit the site and shall have taken into account all relevant aspect of works. No claim for adjustment to the contract price due to ignorance of the site conditions shall be entertained.

- k. The contractor is responsible for the support services in areas of safety, fire protection and prevention, industrial hygiene and is obliged to comply with by virtue of Statutory Requirements as well as being part of the Contractual Requirements. It is the responsibility of the Contractor that they, their employees and their sub-contractors are aware of and familiar with safety rules and practices as authorized by the Superintending Officer.

All reported unsafe practices or unsafe working conditions will be investigated by the Superintending Officer or his designate.

The contractor is also responsible for performing the works under the contract in a healthy and safe manner including protecting the safety and welfare of other Sub-Contractors.

- a. **First Aid Box or First Aid Room**  
The Contractor shall provide a suitable first aid box or first aid room on site.
- b. **Fire Extinguishers**  
The Contractor shall provide suitable fire extinguishers on site as instructed by the Superintending Officer. The type and the quantity of the equipments shall be appropriate to the circumstances of the works and to the satisfaction of the Superintending Officer.
- c. **Personal Protective Equipment**  
The contractor shall provide proper personal protective equipment such as helmets, safety boots, goggles and any safety gears whatsoever necessary to the nature of the works to all workers and ensure that these safety gears be utilized by his employees and his sub-contractors.
- d. **Warning Signs**  
Warning signs must be provided and maintained at work sites as instructed by the Superintending Officer.
- e. **General Safety Provision**  
Suitable overhead protection of the form of safety nets, catch platforms and hoardings, etc are to be provided where persons are required to work or pass by places that are normally exposed to falling materials or objects.
- f. **Health and Welfare**  
Pay all costs and charges incurred by and comply with all Health and Welfare Regulations pertaining to all persons on the site.

A. GENERAL

The materials to be used shall be of the best quality approved by the Superintending Officer. All workmanship shall be equal to the best in prevailing trade practices.

Unless otherwise described, all material shall be new and in accordance with the latest British Standard Specification and the Contractor shall produce all necessary certificates to substantiate this fact if so required by the S.O. Unless otherwise described, the description of each item of work shall include for conveyance and delivery, unloading, storing hoisting, all labour setting fitting and fixing in position, all cutting and waste, covering up and protecting finished work, clearing away all debris and waste, return of packing, carriage, establishment and overhead charges and profit.

The Contractor shall ensure that all materials are stored properly to prevent deterioration and any handling or transporting of the materials shall be done with care to prevent damage.

Materials which fail to comply with the requirements of the specifications will be rejected and shall be removed from site forthwith. No claim will be entertained if there is any delay arising thereof.

B. SAMPLES

The Contractor shall note that works carried out without submitting samples for prior approval shall, in the event of unsuitability or unacceptability due to either material or workmanship both be rejected forthwith without benefit of compensation in either money or time and the Contractor shall be required to replace such works immediately in accordance with the requirement of the Superintending Officer.

C. WORKMANSHIP

Workmanship generally is to be of the highest standard obtainable and in all cases where British Standard Code of Practice exists and is applicable to any portion of the works, the Contractor shall allow for complying with the recommended practice unless such procedure would directly conflict with requirements stated elsewhere in these documents

## **B1. SCOPE OF WORK**

The following should include in the scope of works as per in the Summary of Tender:

### **1. PRELIMINARIES & GENERAL WORKS**

The Contractor shall comply with all Government requirements, ensure proper site assessment prior to commencing work, and provide all labour, materials, tools, equipment, insurances, and temporary facilities necessary for the execution of the works for the **Construction and Expansion of The Parking Area Near Block L**. All insurances, including Workmen's Compensation, Public Liability, and Fire Insurance, shall be maintained for the duration of the project. Mobilization and demobilization of all resources shall be included. No claims arising from misunderstanding of site conditions shall be entertained.

### **2. SITE CLEARANCE AND EARTHWORKS**

The Contractor shall clear the designated land area for the construction and expansion of the parking lot, covering an approximate total surface area of 7,396m<sup>2</sup>. Works include the removal of all vegetation, weeds, scrubs, undergrowth, debris, and approximately thirty-five (35) existing trees, inclusive of stump and root extraction. All resulting debris shall be removed immediately and disposed of at an approved disposal site. Earthworks shall include excavation to reduce ground levels exceeding 300mm depth across the full formation area of approximately 7,396m<sup>2</sup>, ensuring proper grading and preparation for subsequent pavement layers.

### **3. GROUND PREPARATION AND PAVEMENT WORKS**

Ground preparation shall include the supply, spreading, leveling, and compaction of hardcore materials across 7,396m<sup>2</sup>, followed by sand blinding where required. Formwork with widths between 100mm and 200mm shall be installed around slab edges and construction boundaries. A 1000-gauge polyethylene damp-proof membrane shall be supplied and installed with proper overlaps and turn-ups. Reinforcement shall consist of BRC A8 mesh, weighing 3.95kg/m<sup>2</sup>, installed throughout the slab area. The Contractor shall then cast a 150mm-thick reinforced concrete slab (Grade 25 / Ready-Mix) across the full 7,396m<sup>2</sup> parking area. All levels, falls, and surface finishing shall be executed to achieve proper drainage and surface durability.

### **4. DRAINAGE CONSTRUCTION**

The Contractor shall construct new reinforced concrete drains measuring 400mm (width) × 300mm (depth) × 400mm (height) with 150mm wall thickness, ensuring structural stability and proper water flow. These drains shall run for an approximate total length of 220 linear metres, with proper excavation, reinforcement, formwork, concrete placement, and gradient finishing. All drains shall be connected to the nearest existing drainage lines as directed. Additionally, the Contractor shall fabricate and install heavy-duty steel gratings measuring approximately 500mm × 500mm using 4mm–6mm thick mild steel, to be installed across an approximate total length of 217 linear metres, complete with two coats of anti-corrosive paint.

### **5. KERBING AND EDGE TREATMENT**

New concrete kerbs shall be constructed along the perimeter and internal divisions of the parking lot. Kerbs shall measure 170mm (height) × 100mm (width) × 170mm (depth) with a curved top profile matching existing standards. The installation shall cover a total approximate length of 450 linear metres. All kerbs shall be painted with alternating black and white reflective coatings and installed with proper alignment, foundation support, and finishing.

### **6. ROAD MARKING AND TRAFFIC SIGNAGE**

The Contractor shall apply all required road markings using approved outdoor reflective paint (ICI or equal approved). Markings include parking bay lines, directional arrows, and arrow signs. Pedestrian walkway markings (blue and white) shall be executed using JOTUN epoxy paint or other equal approved epoxy paint, applied in accordance with the manufacturer's instructions and Engineer's

approval, with a minimum clear width of 0.8 m and an approximate length of 430 m, including full surface preparation, application, and curing. All quantities shall be confirmed during site inspection. The Contractor shall also supply and install four (4) directional signboards labeled "MASUK/IN" and "KELUAR/OUT," fabricated using aluminium or stainless-steel sheets with galvanized iron posts. Posts shall be primed with anti-corrosive undercoat and finished with two coats of ICI steel paint. Signage height, dimensions, and mounting locations shall follow the Supervising Officer's instructions.

**7. OUTDOOR LIGHT INSTALLATION**

The Contractor shall install the complete lighting system for the parking area, including cables, foundations, poles, connectors, and luminaires. Underground lighting cables shall consist of 1 x 4-core 10mm<sup>2</sup> PVC/SWA/PVC cable, to be excavated, laid with slab protection, and backfilled over an approximate total length of 567.2 linear metres. Concrete foundations for poles shall measure 600mm depth x 300mm width. The Contractor shall supply and install eight (8) hot-dip galvanized lighting poles, each 6 metres in height, complete with brackets, bolts, nuts, grounding systems, and service access doors. Lighting fixtures shall include seven (7) 150W LED single-entry lanterns and one (1) 150W LED double-entry lantern, connected using 3 x 1-core 1.5mm<sup>2</sup> PVC cables. Complete testing and commissioning must be carried out to ensure full functionality and lighting uniformity.

**8. SURFACE WATER MANAGEMENT ENHANCEMENT**

To support the expanded parking area, the Contractor shall upgrade or integrate additional surface water flow systems to prevent pooling or flooding. All drainage components must be inspected and aligned to ensure continuous and unobstructed water flow.

**9. ROAD FURNITURE AND SAFETY COMPONENTS**

The Contractor shall supply and install all necessary road furniture including bollards, wheel stoppers, traffic delineators, pedestrian crossing markers, and any additional safety features required for proper traffic circulation. All installations shall comply with established standards and Supervising Officer instructions.

**10. WARRANTY REQUIREMENT**

All works, including pavement, drainage, lighting, kerbs, signage, and road furniture, shall carry a minimum nine (9) month warranty upon project completion. Any defects shall be rectified immediately at no additional cost to the Government. Warranty plates with Contractor information and expiry dates shall be installed at approved locations.

**11. SUBMISSION OF APPROVAL**

The Contractor shall submit catalogues, specifications, material samples, and technical data for all proposed materials and products including lighting units, signage, road marking products, and grating materials. No procurement shall begin without prior approval of the Supervising Officer.

**12. MATERIAL STANDARD**

All materials and components used in the project must comply with recognised standards such as Brunei, Singapore, British, or Australian Standards. All materials must be new, durable, weather-resistant, and suitable for outdoor civil works.

**13. OPERATION AND MAINTENANCE DOCUMENTATION**

Upon completion, the Contractor shall supply three (3) sets of operation and maintenance manuals covering lighting systems, drainage layouts, and other installed features. Manuals shall include as-built drawings and maintenance procedures.

**14. TESTING AND COMMISSIONING**

The Contractor shall perform completion tests for lighting, drainage, pavement quality, and markings to ensure all installations meet required performance standards. Any defects identified during testing shall be rectified immediately, and re-testing shall be carried out until compliance is achieved.

**15. ACCEPTANCE TEST**

Acceptance testing shall be conducted in the presence of the Supervising Officer to verify that all systems perform according to specification. The Contractor shall supply all necessary equipment and personnel for this purpose.

**16. CERTIFICATE OF PRACTICAL COMPLETION**

After successful testing and verification, the Supervising Officer will issue a Certificate of Practical Completion marking the official completion date of the works.

**17. TRAINING OF GOVERNMENT PERSONNEL**

The Contractor shall provide on-site training for Government maintenance personnel for a minimum of one week, covering the operation and maintenance of lighting systems, drainage elements, and traffic installations.

**18. PAINTING WORKS (PARKING INFRASTRUCTURE)**

Painting works shall include kerb painting, bollard coatings, and any other specified structural components within the parking area. All paint systems shall include proper surface preparation, primer application, and finishing in accordance with manufacturer recommendations.

### SECTION 3

SCHEDULE	CONTENTS	PAGES
SCHEDULE A	SUMMARY OF TENDER	1 –5
	SITE VISIT FORM	APPENDIX 3
	TENDER SUBMISSION REQUIREMENT	APPENDIX 4
SCHEDULE B	TENDER FORM	8
SCHEDULE C	INFORMATION SUMMARY	9
SCHEDULE D	SUB-CONTRACTS	10
SCHEDULE E	COMPANY'S BACKGROUND	11
SCHEDULE F	REFERENCES	12
SCHEDULE G	LETTER OF DECLARATION	13
	LIST OF COMPANY AND OWNERSHIP	
SCHEDULE H	COMPLIANCE FORM	15

**SECTION 3**  
**SCHEDULE A**  
**SUMMARY OF TENDER**

No.	Description	UNIT	Rate (B\$)	Amount		
				Quantity	\$	¢
	<p><b><u>SECTION 1 – PRELIMINARIES AND GENERAL CONDITIONS</u></b></p> <p><b><u>Note:</u></b></p> <p>The contractor shall carry out site visit inspection and take into account all aspects and conditions of site before submitting his tender. The contractor must fill this schedule at the time of tendering. Supply all materials, labor, tools and everything else deemed necessary to carry out work as specified as per listed below to the following. No claims for additional payment will be entertained on the ground of misunderstanding or misinterpretation of the conditions, measurements, etc.</p>					
<b>A</b>	<b>PRELIMINARIES</b>					
1.0	<p>Allow sum of preliminaries shall comply with specification and other requirements. The contractor shall undertake to execute everything that is deemed necessary prior to the commencement of works. Mobilization and demobilisation of all tool and equipment and platforms and everything else as required and necessary for the execution and completion of the works as required.</p> <p>Insurances policies. Allow for the expenses incurred for providing policies and other insurances as may be necessary to protect the Contractor's and Government's interest and shall valid <b>until the end of the defect liability(maintenance) period:</b> -</p>	LOT		1		
1.1	Workmen's Compensation's Policy in the joint names of the Government and the Contractor.	LOT		1		
1.2	Public liability Policy in the joint names of the Government and the Contractor.	LOT		1		
1.3	Fire policy in the joint names of the Government and the Contractor.	LOT		1		

No.	Description	UNIT	Rate (B\$)	Amount		
				Quantity	\$	¢
<b>B</b>	<p><b><u>SECTION 2 – GENERAL WORKS</u></b></p> <p><b><u>Note:</u></b></p> <p>All materials arising from demolition work are regarded as debris and are to be removed from the site unless otherwise instructed by S.O</p> <p>The contractor price shall include for all costs associated therewith. The contractor shall assess the extent of work involved during the site visit. No claim charges or whatsoever shall be entertained due to contractor's failure to assess the extent of the work involved during the tender stage.</p>					
1.0	Remove offsite concrete slab, rubbish, debris, weeds, scrubs, stumps, coconut tree and any tree (approx. 35no) up to root as per Supervising Instruction and dump to Contractor site area.	LOT		1		
1.1	Excavate oversite to reduce level exceeding 300mm depth with approximately area: - 7,396m <sup>2</sup>	M <sup>2</sup>		7,396		
1.2	Hardcore filing spread level & blinding and consolidated irrespective of thickness with approx. area: - 7,396m <sup>2</sup>	M <sup>2</sup>		7,396		
1.3	To provide sawn formwork to edges and breaks in slab, wall and etc. 100mm to 200mm wide with approx. area: - 7,396m <sup>2</sup>	M <sup>2</sup>		7,396		
1.4	To supply and lay "Poly-film" 1000 polyethylene sheet or other equal approved damp proof membrane laid underground slab including turns-ups with approx. area: - 7,386 m <sup>2</sup>	M <sup>2</sup>		7,396		
1.5	To supply and lay one/two layers of BRC steel mesh rod reinforcement A8;3.95kg/m <sup>2</sup> and reinforced concrete 25(Grade B) ground slabs ( <b>READYMIX</b> ) and paving 150mm thickness include leveling, screeding and etc. to the following area: <ul style="list-style-type: none"> <li>▪ Parking Lot with approximately area: - 7,396m<sup>2</sup></li> </ul>	M <sup>2</sup>		7,396		
1.6	To construct new 170mm x 100mm x 170mm concrete kerb with curve top surface match to existing and finish with paint (black & white) with approximate length: - 450m/r.  (Work include excavate, formwork, reinforcement and concrete. Any additional concrete kerb required shall be included in the price).	M/R		450		

No.	Description	UNIT	Rate (B\$)	Amount		
				Quantity	\$	¢
1.7	To construct new 400mm(h) x 300mm(W) x 400mm(h) size dimension with approx.150mm thickness, both sides include gradient (as standard MOD) for proposed new concrete drain match/joint to the existing drain (if necessary required) with approximately length: - 220m/r.  (Work include excavate, formwork, reinforcement, concrete and finished with gradient; for drain water flow).	M/R		220		
1.8	To fabricate and welded 4mm-6mm by 50mm width thickness mild steel bar/angle iron match to existing, for proposed new grating (approx. size: - 500mmx 500mm) to existing concrete slab and finished with two coats of anti-corrosive paint with approx. length: - 217m/r	M/R		217		
1.9	To supply and lay three coats of ICI reflective road line paint or other equal approved paint in accordance to manufacture instruction for proposed below: - <ul style="list-style-type: none"> <li>▪ Parking Line</li> <li>▪ Arrows</li> <li>▪ Arrow sign</li> </ul>	LOT LOT LOT		1 1 1		
1.10	To supply and apply JOTUN epoxy paint or equal approved paint for pedestrian walkway markings in blue and white, in accordance with the manufacturer's instructions and Engineer's approval, with a <b>minimum clear width of 0.8 meters</b> and an <b>approx. length: - 430m/r</b> including complete surface preparation, proper application and curing as per epoxy paint specifications.  (Any additional on measurement/excavate/painting/hardcore/cutting tree /concrete and etc. on <b>Item 1.0 – 1.10</b> shall be include in the amount price)	M/R		430		
1.11	To supply and install new label signage " <b>MASUK/IN</b> " AND " <b>KELUAR/OUT</b> " using aluminum/stainless steel plate with GI post as Supervising instruction.  (Post shall be painted with two under coat anti-corrosive paint and two coat of ICI steel paint finished)	NO		4		
<b>3.0</b>	<b>COMPOUND LIGHTING FOR NEW CAR PARK</b>					

No.	Description	UNIT	Rate (B\$)	Amount		
				Quantity	\$	¢
3.1	Supply and laid 1 x 4 core 10mm <sup>2</sup> PVC/SWA/PVC cable slab yellow excavate and backfill.  (Contractor shall rectify and connect from the 1 <sup>st</sup> point at the existing light pole and the nearest light pole. Any additional measurement that are required shall be included in the price.)	M/R		597		
3.2	Supply and install 600mm(d) x 300mm(w) concrete foundation inclusive of excavation and backfill.	NO		10		
3.3	Supply and install of new approx. 6meters height hot dip galvanized flanged type pole c/w 300mm single short arm bracket, bolt and nuts, service hinged door to existing 8-meter height hot dip galvanized flanged type pole. Brand: LYCORPOLE  (Any additional poles required shall be deemed included in the price).	SET		10		
3.4	Supply and install of cable gland for above items.	NO		10		
3.5	Supply and install 4 poles 32 connector, 6A SP MCB and aluminum plate into lamp pole.	NO		10		
3.6	Supply and install of 3 x 1 core 1.5mm <sup>2</sup> PVC cable from 4 pole 32A connector to LED 150watt street lantern.	NO		10		
3.7	Supply and install of LED 150-watt side entry street lantern	SET		9		
3.8	Supply and install of LED 150-watt double entry street lantern	SET		1		
3.9	Testing and commissioning	LOT		1		
<b>TOTAL AMOUNT (B\$)</b>						

## SITE VISIT FORM

TENDER REFERENCE NO.: KK/08/2026/SSBH

**INVITATION TO TENDER FOR KERJA-KERJA PENAMBAHAN LETAK KERETA KAWASAN  
BERDEKATAN BLOK L HOSPITAL SURI SERI BEGAWAN, KUALA BELAIT**

---

COMPANY NAME : \_\_\_\_\_

DATE OF SITE VISIT : \_\_\_\_\_

I hereby on behalf of my Company has made a Site Visit to the work location on the date stated above and understand the work requirement(s) and all specification stated in this Tender document.

I (My Company) also agree not to make any additional claim to MOH should any accident(s) or damage(s) occur during the contract period.

**CONTRACTOR'S SIGNATURE**

<b>COMPANY STAMP</b>

NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

**FOR OFFICIAL USE ONLY**

VERIFIED BY  
S.O./O.I.C.

<b>DEPARTMENT STAMP</b>

NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

The Contractor must fill in this form and obtain signature from the S.O./O.I.C. as verification for having visited the Site. Failing to do so will lead to **disqualification** from this Tender.

**Note:**

Site Visit shall **ONLY** be done on Tuesday or Thursday prior to the tender closing date.  
( 09.30 AM - 12.00PM )  
( 01.45 PM - 04.00PM )

Telephone No.:3335331/2 Ext. no. 3276 / 4304

## TENDER SUBMISSION REQUIREMENT

TENDER REFERENCE NO.: KK/08/2026/SSBH**INVITATION TO TENDER FOR KERJA-KERJA PENAMBAHAN LETAK KERETA KAWASAN BERDEKATAN BLOK L HOSPITAL SURI SERI BEGAWAN, KUALA BELAIT**

---

**GENERAL CHECKLIST**

The Tenderer is required to fulfil all requirements stated in this section by submitting a **copy** of all relevant documents whichever applicable to this Tender, stamped and shall complete the checklist provided as a verification. **Incomplete submission can render the Tenderer's submission of Tender to be invalid** (Clause 3.1.3, Financial Regulation 2022).

**DESCRIPTION**

1. Valid Builder's License/Contractor Registration Certificate/Supplier's Certificate approved by the Authority for Building Control and Construction Industry (ABCI), Ministry of Development.
2. List of company's workers with names as stated in the identity card/passport, identity card number, position and salary and local and foreign workers percentages.
3. Latest Certificate of Tax Compliance from the Revenue Division, Ministry of Finance and Economy.
4. Confirmation compliance to Employee Trust Act and Supplemental Contributory Pension Trust Order 2009 from Tabung Amanah Pekerja Act including stating employer account number and list of contributed employees.
5. Registry of Companies and Business Names approved via Corporate Registry System in One Common Portal.
6. Completing the Tender's Integrity Declaration Form.
7. Copy of company owner/Director identity card (front and back).
8. Company Registration Licence Form X, 16 & 17.

**SCHEDULE B**  
**TENDER FORM**

1. I/we, the undersigned having examined and fully understood the tender Documents, inspected and checked the site, offer to carry out and execute the above work in accordance with all relevant Standards Specification and Codes of Practice for the sum of Brunei Dollars.

Brunei Dollars \_\_\_\_\_  
\_\_\_\_\_ (B\$ \_\_\_\_\_ ) only.

2. If my/our tender is accepted, I/we undertake to complete the whole works **within SIX MONTHS from** the date of possession/commencement allowing for all possible cause of delay which can reasonably be foreseen and not merely representing the number of working days required.
3. I/we confirm that my/our tender has been calculated on a firm price basis and that I/we have taken into account all aspects, site conditions and other matter that may affect the works. I/we understand that I/we not be allowed any claims for payment may arise out of my/our misunderstanding, and/or misinterpretation and/or miscalculation of the works and/or site conditions.
4. I/We agree to the provision and conditions in **Appendix**
5. I/we understand and agree that the Government has the option to accept part of my/our tender and I/we agree and confirm that in such case, there shall be no adjustment of my/our tender prices and/or rates.
6. Unless and until a formal agreement is prepared and executed, this tender offer together with your Letter of Acceptance thereof shall constitute a legal and binding contract between us.
7. Our Tender is fully consistent with and does not contradict or derogate from anything in your Invitation To Tender. We have not qualified or changed any of the provisions of your Invitation To Tender.
8. Our offer is valid for **six (6)** calender months from the tender closing date.
9. When requested by you, we shall extend the validity of this offer.

Signature & Date \_\_\_\_\_

Name \_\_\_\_\_

In the capacity of \_\_\_\_\_  
(Position in the Company)

\_\_\_\_\_  
(Tenderer Official Stamp)

On behalf of \_\_\_\_\_  
(Name of Company).

Address \_\_\_\_\_

Telephone & Fax \_\_\_\_\_

MOD Registration No \_\_\_\_\_  
(Copy of MOD Registration Certificate to be attached)

Class / Category \_\_\_\_\_

Tender Deposit No. \_\_\_\_\_

## **SCHEDULE C**

### **INFORMATION SUMMARY**

- 2.1 Tenderers shall provide in this Schedule the following information:
- a. Management summary
  - b. Company profile [including Contractor and sub-contractor(s), if any]
  - c. Years of experience (as of the Tender Closing Date) of the Contractor and sub-contractor(s) in the:
    - Building works and services; specialized in installation of building work, plastering, painting for housing, parking lot, Electrical Works, sewerage and plumbing.
  - d. Minimum manpower proposal for the project which will be full time on site
  - e. Other information which is considered relevant.

**SCHEDULE D**

**SUB-CONTRACTORS**

- 3.1 Tenderers shall complete Table 3 with information about all the companies involved in the provision of the services and items specified in this tender. This shall include details about the Contractor and each sub-contractor involved, as well as their respective responsibilities.
- 3.2 Tenderers shall also indicate in Table 3.1 any alliance relationship established with each sub-contractor. An alliance is defined as a formal and binding business relationship between the allied parties.

Table 3.1 - Responsibility Table

		<b>Alliance Relationship between Contractor and Sub-Contractor(s)</b>		
<b>Company Name</b>	<b>Responsibility Description</b>	<b>Alliance Exists? (Y/N)</b>	<b>Date Established</b>	<b>Alliance Description</b>
Contractor				
		Not Applicable	Not Applicable	Not Applicable
Sub-Contractor(s)				

**SCHEDULE E**

**COMPANY'S PROFILE**

4.1 Each of the companies involved in this tender, including Contractor and subcontractor(s) (if any), shall provide information on the company's background, scope of operations, financial standing and certified copy of its Certificate of Incorporation or Certificate of Registration with the Ministry of Development.

Name of company : .....

Registration No : .....

Type Of Company : .....  
(Sdn.Bhd., Partnership, Sole proprietor, Joint Venture, Trading Co.)

Authrosied Capital (B\$) :..... Paid-up Capital (B\$) :.....

Banker for the Cmpany's business:.....

Table 4 – Shareholders Table

<b>Directors/Shareholders/ Proprietor</b>	<b>Percentage Share</b>	<b>Brunei I/C Number</b>	<b>Immigration Status</b>

Current workforce (No.of persoms) in Brunei :-

a) Management :.....

b) Engineeers :.....

c) Technicians:.....

d) Tradesman :.....

e) Trainee/Workman :.....

f) Others :.....

TOTAL WORKFORCE : .....

No. of persons

We certify that the above information is correct.

## SCHEDULE F

### REFERENCES

- 5.1 Tenderers shall submit a list of customers in Table 4.1 to whom the Contractor has provided similar works and items as specified in this tender in the recent 5 years as of the Tender Closing Date.

Table 5.1 - References of previous customers

<b>Customer Name &amp; Address</b>	<b>Customer Type (Gov't or Quasi-Gov't)</b>	<b>Contact Person</b>	<b>Title</b>	<b>Contact Number Fax Number &amp; Email Address</b>

\*Note: Tenderers shall indicate whether the customer is a Government or Quasi Government organisation. A Quasi Government is defined as an organisation which (1) is managed and controlled by the Government; or (2) has at least 50% shares being held by the Government. Please leave the column blank if the customer is neither a Government or Quasi Government organisation.

- 5.2 The Ministry of Health shall treat all the information submitted under this schedule in strict confidence.
- 5.3 The Ministry of Health reserves the right to contact the references for tender assessment purposes.

**SCHEDULE G**

**PENGAKUAN PENENDER  
*TENDERER'S DECLARATION***

**SCHEDULE - H**

**STATEMENT OF COMPLIANCE**

7.1 Tenderers shall indicate their compliance by providing a compliance table in Table 7 with clause by clause including sub-clause by sub-clause statement of compliance corresponding to all the sections of Section 2 – Specifications.


7.2 Proposal without the compliance table will be considered incomplete and will be disqualified.

Table 7 - Compliance Table

Section	Descriptions	Compliance <sup>1</sup>		Remarks <sup>2</sup>
		Yes	No	
1	Instruction To Tenderers			
2	Specification			
3	Scope of Work			
4	Form of Tender			

Note:

<sup>1</sup> Please put a tick ( ✓ ) at “Yes” column if complied, and a tick ( ✗ ) at “No” column if not complied.  
<sup>2</sup> Where appropriate, Tenderer shall specify how the requirement will be met in the Remarks column

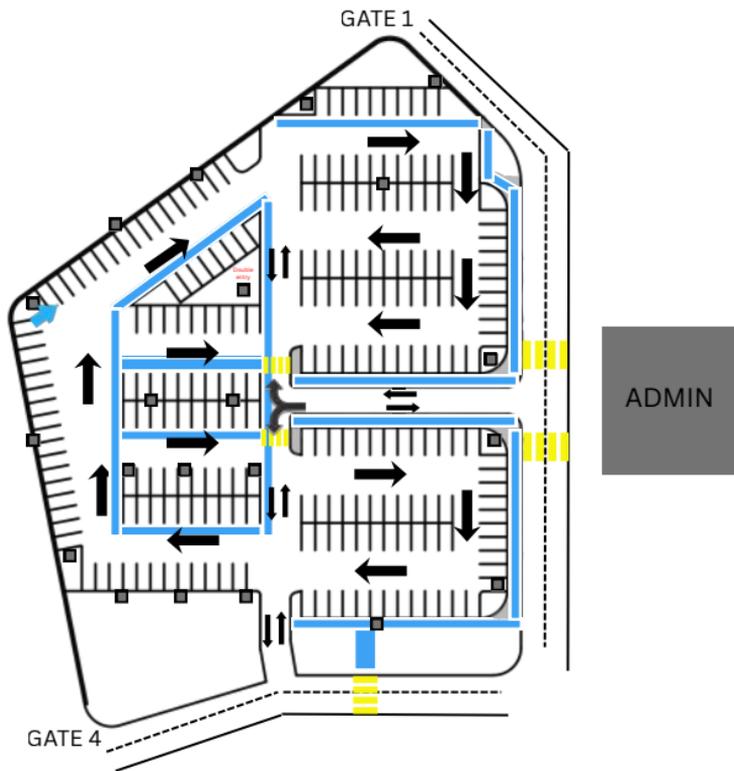

■ -compound lighting

— -pedestrian walkway

➡ -one way street

|||| -zebra crossing



Petro Laut Sdn. Bhd  
Marine supply store

Jalan Bunga Raya

Jalan Bunga Raya

Jalan Bunga Raya

Jalan Laksamana

PARKING LOT 

Suri Seri  
Begawan Hospital

Google Maps